

MASTERLOAD® Series

THE NEXT GENERATION ELECTRONIC REGISTER





MASTERLOAD.¹Q™
Zone 2 & Div. 2 Rated

MASTERLOADX.IQ

PART OF CENTRILOGIO®

Ease of Use

Built from the ground up by Liquid Controls' Research & Development team with close collaboration with customers who benefit from it, fueler safety, ease of use, and data management are the highest priorities in the design of the MASTERLOAD.iQ®.

HIGH-RESOLUTION DISPLAY WITH DAY/NIGHT MODES

7" ultra bright video display designed for extreme climates and rigorous fueling environments.

LARGE SCALABLE DIGITS FOR EASY VIEWING

Large digits provide easy viewing, day or night, up to 100 feet (30 m) away.

CONFIGURABLE FUELING DATA

The MASTERLOAD.iQ® allows users complete control over the fueling data fields displayed on the detailed delivery screen.

SMART KEYS FOR GUIDED OPERATION

Smart keys guide the operator through the next available steps in the operation to minimize risk of error.

LARGE KEYS FOR EASY OPERATION

Large, petroleum and UV resistant elastomeric keys provide confident feel and consitent operation.

CONFIGURABLE SCREEN DETAILS

Easily configure the idle and active fueling screens the operator sees before, during, and after fueling. Features like tank level gauge, flow rate, totalizers, and any other field the register measures can be displayed on the main screen.



PANEL MOUNT ENCLOSURE OPTION

New panel mount design allows convenient remote mounting, providing OEMs greater design flexibility.

ACTIVE FUELING FULL SCREEN DETAIL MODE

Yellow background indicates active fueling mode to improving safety and fueling status awareness of operators,

MULTI-LANGUAGE FUNCTIONALITY

Operator level languages include: English, Spanish, German, French, Portuguese, Chinese, Korean

Configurability

It's just that simple.

LC engineers designed the MASTERLOAD.iQ® from the user's perspective. The result is a user-guided, configurable interface that walks the operator through the complete fueling operation, minimizing chance for error.

COMMON FUELING PROCESSES COMPLETED IN 3 STEPS OR LESS!



SMART CONFIGURATIONS Guide the operator through the fueling process of your choosing.

From basic pump and print to presets by volume, price, or even product weight*, the operator can be automatically guided through a series of questions prior to starting the delivery.

OPERATOR FRIENDLY SCREENS WITH DAY / NIGHT MODES AND BRIGHTNESS CONTROL

MASTERLOAD.iQ® screens adapt to the operator. Full, active fueling screen with yellow background when "Start" is pressed with day/night mode and brightness control options.

DONE!



Day mode idle screen

Night mode idle screen

Active fueling mode full screen

Active night mode detail screen

MASTERLOAD.iQ® User Configuration and Setup Features

Configurable idle screen - Design the fueling screen the way you want it.

Configurable fuel delivery process - Step by step on-screen instructions guide the operator through the fueling process you specify.

Configurable Languages - English, Spanish, French, German, Portuguese, Chinese, Korean

Configurable date, time, and units of measure formats - Set local units of measure and date/time formats to eliminate unit conversions

Configurable product types - Configure product types and terms based on local terminology

Configurable flow rate min/max thresholds - Set alerts to notify user if flow rates exceed thresholds

Configurable I/O settings - Define what each input and output is assigned to and how they are utilized

Configurable tickets and printer settings - Easily tailor ticket header text, fields, and printer type

Configurable product pricing and taxes - Either fixed or user definable pricing and taxes at the delivery level

Configurable data logging and retention period - Define how long to retain fueling transactional data on-board the MASTERLOAD.iQ[©]

Configurable electronic temperature volume compensation - Available with optional temperature probe and thermowell kit

Setup, Calibration and Security


iQ settings and preferences transferable to multiple registers - Set up once, then backup and install configuration across multiple units

Intuitive Calibration - Easy to follow meter calibration and linearization process.

New Features

MEASURED AND MANUAL TANK INVENTORY

The MASTERLOAD.iQ provides highly accurate tank level measurement and inventory management for up to 12 tanks and products. Each tank can be configured according to product type, tank size, or measurement method to be used (either automatic or manual

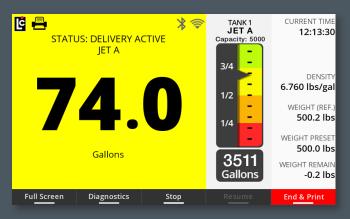

TANKIO[™] (patent pending)

Auto-Calibrate Your Tank Inventory

The MASTERLOAD.iQ offers the first ever continuously calibrated tank profile that does not require tank strapping charts.

- When using an approved tank level gauge with 4-20 mA output, it auto-generates a precise tank strapping profile.
- Delivers highly accurate measured tank inventory and controls without the need of middleware or third party control or display devices.

New Features

EXPANDABLE INPUTS & OUTPUTS


The SENSEIQ expansion board is available for applications with more demanding sensing and control options such as multiple measured tank levels, water detection, remote controls, external display devices, etc.

SENSEIQ

Expand Your Inputs and Outputs

Provides end users the capability to connect and control a multitude of external devices in applications where additional inputs or outputs are required.

- 6 Analog inputs: Multiple Tank level sensors, H2O sensor
- 4 Digital inputs: remote start / stop / print. Pulse inputs
- 4 Digital outputs: Large digit external displays, calibrated pulse output, alarms, deadman control alarms.

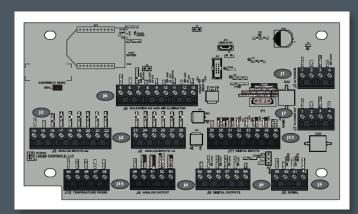

MULTIPLE LANGUAGE SUPPORT

The MASTERLOAD.iQ provides embedded language files to support operator level language translations easily selectable from the settings menu.



Change the Language for Operators

MASTERLOAD.iQ® fully supports multiple languages on operator level screens for increased safety and efficiency in fueling.

- Spanish
- French German
- Portuguese
- Chinese
- Korean


DIGITAL VALVE CONTROL

The MASTERLOAD.iQ provides configurable digital valve control to gain higher levels of control over delivery flow rates than conventional registers that are limited to utilizing simple 2-stage block valves for flow control.

Gain Flow Control Over Your Deliveries

Gain full control over your fueling application with multistage variable control and ramp up and ramp down of flow rates during deliveries.

- Ideal for applications where precise flow-rate control is critical for both safety and fueling accuracy.
- Utilize the same fueling equipment in both high and

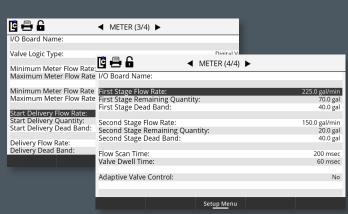

CONFIGURABLE LARGE DIGIT DISPLAY

The MASTERLOAD.iQ now allows users to configure the large digit data displayed to include total retail sale and volume measured to the 1/1000th decimal place or flow rate and volume when real-time of rate of fuel delivery monitoring is required.





Configure Your Display

Certain retail fueling applications require total sale and volume to the 1/1000th place or real-time flow rates on the primary fueling screen.

WATER DETECTION AND SAFETY CONTROLS (Aviation)

When configured with an approved water sensor, MASTERLOAD.iQ provides boundary controls and safety shut down according to Joint Inspection Group (JIG) and Airlines for America standards.





Wireless & Data Connectivity

BLUETOOTH

- Wireless printing with compatible Bluetooth enabled printers
- Wireless control and data transfer via FUELiQ app or SDK

Wi-Fi

- Wireless control and data transfer via FUELiQ app or SDK
- Transaction details accessible using FTP

ETHERNET

- Fueling control and data transfer via LCP protocol
- Transaction details accessible using FTP



SERIAL CONNECTION

- Fueling control and data transfer via LCP protocol
- Ticket printing

FUELiQ[™] Android App

Liquid Controls' new FUELiQ application provides a wireless pathway for fuelers and third-party data providers to gain read-write access to pre-settable data fields on the MASTERLOAD.iQ for operational mobility, efficiency, and transactional data.

[currently in limited beta testing]



Technical Features and Benefits

LCR.iQ [®] Features			
User Input & Display Features			
Large 7" high definition, full color video display -	High clarity and easy visib	ility	
Customizable home screen and delivery setup pr		-	
Full alpha-numeric keypad and arrow selection k	•		
Instant on-board diagnostics and help screens -			
Full screen active delivery mode - Largest readab			
Day/night mode and brightness adjustment - Ope		•	
Customizable printed tickets - Easily tailor ticket	· · · · · · · · · · · · · · · · · · ·	-	
Transaction history logs store 365+ days of data			
Weights & measures historical audit log and ever			
Large LED back lit keypad - Easy to operate with o			
Control Features	groved ridinae, edey to read	and daying it or at ring it.	
Remote control (E-Stop) compatible to third part	t v systems - Seamless ret	rofit into existing systems	
3rd party fleet automation connectivity and data	<u> </u>		
Toggle flow - Optimizes fuel flow rate without driv			
Wireless Printing - Operator can print from hand-		rucis uctively systems	
General	neid remote printer		
Standard meter mount base - Drop-in retrofit for	all conventionally mounte	d ragietare	
Panel mount enclosure option - For remote panel		u registers	
Preset delivery by volume or weight - Provides hi	· · · · · · · · · · · · · · · · · · ·	livery to proyent ever-fueling	
	· · · · · · · · · · · · · · · · · · ·		
4-Bolt even seal o-ring design - Water-tight, wea			
Die-cast aluminum housing - Chromate and powd 11 Conduit Ports (1/2" NPT) - To accommodate ma			
Multi-point calibration up to 16 points - Maximize		-	
Internal telescoping hinges - Eliminates seizing a			
Serial accessibility to LCP data communication p			
Electronic temperature volume compensation -	Available with optional pro	be and thermowell kit	
LCR.iQ [®] Specifications			
Enclosure			
Waterproof, corrosion resistant and dust-proof -	meets IP66 and UL Type 4	X requirements	
Display			
7 inch, 800 x 480 high-resolution, Full Color			
7 inch, 800 x 480 high-resolution, Full Color		Input Voltage	
7 inch, 800 x 480 high-resolution, Full Color Temperature Range		Input Voltage 9-28 VDC	
7 inch, 800 x 480 high-resolution, Full Color Temperature Range -40°F (-40°C) to 140°F (60°C)			
7 inch, 800 x 480 high-resolution, Full Color Temperature Range -40°F (-40°C) to 140°F (60°C) Keypad			
7 inch, 800 x 480 high-resolution, Full Color Temperature Range -40°F (-40°C) to 140°F (60°C) Keypad LED Back-lit		9-28 VDC	
7 inch, 800 x 480 high-resolution, Full Color Temperature Range -40°F (-40°C) to 140°F (60°C) Keypad LED Back-lit Non-conductive, UV resistant elastomer		9-28 VDC Petroleum-resistant	
7 inch, 800 x 480 high-resolution, Full Color Temperature Range -40°F (-40°C) to 140°F (60°C) Keypad LED Back-lit Non-conductive, UV resistant elastomer Communication	2	9-28 VDC Petroleum-resistant Field Replaceable	4
7 inch, 800 x 480 high-resolution, Full Color Temperature Range -40°F (-40°C) to 140°F (60°C) Keypad LED Back-lit Non-conductive, UV resistant elastomer Communication RS232/485 Comm Ports	2 2	9-28 VDC Petroleum-resistant Field Replaceable I/O	4 6
7 inch, 800 x 480 high-resolution, Full Color Temperature Range -40°F (-40°C) to 140°F (60°C) Keypad LED Back-lit Non-conductive, UV resistant elastomer Communication RS232/485 Comm Ports RS485 Dedicated Comm Ports		9-28 VDC Petroleum-resistant Field Replaceable I/O Solenoid Outputs (high current)	
7 inch, 800 x 480 high-resolution, Full Color Temperature Range -40°F (-40°C) to 140°F (60°C) Keypad LED Back-lit Non-conductive, UV resistant elastomer Communication RS232/485 Comm Ports RS485 Dedicated Comm Ports WiFi	2	9-28 VDC Petroleum-resistant Field Replaceable I/O Solenoid Outputs (high current) Programmable Digital Outputs	6
7 inch, 800 x 480 high-resolution, Full Color Temperature Range -40°F (-40°C) to 140°F (60°C) Keypad LED Back-lit Non-conductive, UV resistant elastomer Communication RS232/485 Comm Ports RS485 Dedicated Comm Ports WiFi Bluetooth	2 Internal antenna	9-28 VDC Petroleum-resistant Field Replaceable I/O Solenoid Outputs (high current) Programmable Digital Outputs Digital Inputs	6
7 inch, 800 x 480 high-resolution, Full Color Temperature Range -40°F (-40°C) to 140°F (60°C) Keypad LED Back-lit Non-conductive, UV resistant elastomer Communication RS232/485 Comm Ports RS485 Dedicated Comm Ports WiFi Bluetooth	2 Internal antenna Internal antenna	9-28 VDC Petroleum-resistant Field Replaceable I/O Solenoid Outputs (high current) Programmable Digital Outputs Digital Inputs RTD Probe Input	6 6 1
7 inch, 800 x 480 high-resolution, Full Color Temperature Range -40°F (-40°C) to 140°F (60°C) Keypad LED Back-lit Non-conductive, UV resistant elastomer Communication RS232/485 Comm Ports RS485 Dedicated Comm Ports WiFi Bluetooth Extended range antenna (externally mounted)	2 Internal antenna Internal antenna	9-28 VDC Petroleum-resistant Field Replaceable I/O Solenoid Outputs (high current) Programmable Digital Outputs Digital Inputs RTD Probe Input Optical Sensor Input	6 6 1 1
7 inch, 800 x 480 high-resolution, Full Color Temperature Range -40°F (-40°C) to 140°F (60°C) Keypad LED Back-lit Non-conductive, UV resistant elastomer Communication RS232/485 Comm Ports RS485 Dedicated Comm Ports WiFi Bluetooth Extended range antenna (externally mounted) Processor & Storage	2 Internal antenna Internal antenna	9-28 VDC Petroleum-resistant Field Replaceable I/O Solenoid Outputs (high current) Programmable Digital Outputs Digital Inputs RTD Probe Input Optical Sensor Input	6 6 1 1
7 inch, 800 x 480 high-resolution, Full Color Temperature Range -40°F (-40°C) to 140°F (60°C) Keypad LED Back-lit Non-conductive, UV resistant elastomer Communication RS232/485 Comm Ports RS485 Dedicated Comm Ports WiFi Bluetooth Extended range antenna (externally mounted) Processor & Storage Dual-Core Processor Speed	2 Internal antenna Internal antenna	9-28 VDC Petroleum-resistant Field Replaceable I/O Solenoid Outputs (high current) Programmable Digital Outputs Digital Inputs RTD Probe Input Optical Sensor Input Scalable Pulse Output (Additive inj, display, PLC)	6 6 1 1
	2 Internal antenna Internal antenna	9-28 VDC Petroleum-resistant Field Replaceable I/O Solenoid Outputs (high current) Programmable Digital Outputs Digital Inputs RTD Probe Input Optical Sensor Input Scalable Pulse Output (Additive inj, display, PLC)	6 6 1 1

6 MASTERLOAD.IQ

CENTRILOGIO®

Inspired through LC's PartnerConnect™ initiative, Liquid Controls' new **CENTRILOGiQ®** platform provides adaptive sensing and communication that is scalable to adapt to future decades of new technology.

LPG & Refined Fuels

MASTERLOAD.iQ® simplifies fueling operations with process configurability, intuitive operation, real-time fueling diagnostics and data connectivity to maximize up-time and daily throughput.

Aviation Fueling

MASTERLOAD.iQ® provides an easy to use, operator interface and integrates critical sensing devices in aviation fueling systems, improving safety and efficiency while safeguarding all fueling system data.





















LIQUID CONTROLS LLC

105 Albrecht Drive Lake Bluff, IL 60044 USA MAIN: 847.295.1050 TOLL FREE: 800.458.5262



